

# Kingsford Hotel Bacolod — BMS (AB-Run-2)

## Comprehensive Technical & Commercial Proposal

**Document version:** 1.0 (initial issue) **Date of issue:** 2026-04-28 **Prepared for:** Megaworld Corporation **Project reference:** TUEC-PR-AUX-010 — Building Management System **Site:** Manhattan Street, The Upper East, Bacolod City, Negros Occidental **Proposal validity:** 90 days from date of issue **Currency:** Philippine Peso (PHP)

---

### 1. Cover Letter

To Megaworld Corporation

Attention: Mr. Rome Amiel P. Gonzales

Dear Sir,

**Subject: Proposal for the Complete Supply, Delivery, Installation, Testing and Commissioning of the Building Management System for the Kingsford Hotel Bacolod Project**

We are pleased to submit this comprehensive proposal in response to your enquiry regarding the supply and installation of the Building Management System (BMS) for the Kingsford Hotel Bacolod project. Our proposal has been prepared based on a detailed and structured engineering analysis of the following project documents:

- **BMS Points list (TUEC)** — sheets BMS-01, BMS-02, and BMS-03 (Process and Instrumentation Diagrams), dated October 2025, prepared by R.J. Calpo & Company under the seal of Reynaldo J. Calpo, Professional Mechanical Engineer (License No. 0001784)
- **EE Plan (TUEC)** — Construction Bulletin No.8, dated 5 November 2025, prepared by Mario A. Alix Philippines, Inc., covering revised electrical layouts, load schedules, and power riser diagrams
- **Megaworld MC Standards** — DRC-004-2024 Revised BMS Standards Condotel, including Mechanical and Plumbing Points Lists

Our scope reflects the project-specific points list as the governing reference and adopts the Megaworld MC Standards as the baseline for items where the project-specific specification is silent. Where our analysis identified gaps or ambiguities in the available documentation, we have made reasoned engineering assumptions in the interest of providing a complete and actionable proposal — these assumptions are explicitly catalogued in **Section 11 (Stated Assumptions)** of this document, together with their potential cost impact, so that any disagreement can be reconciled before contract execution.

This proposal package consists of the following sections:

- **Sections 1–4:** Customer-facing narrative — cover letter, executive summary, project background, and our understanding of the scope.
- **Sections 5–7:** Technical proposal — system architecture, per-subsystem technical descriptions, equipment list, network design, power provisions, programming and HMI approach, cabling philosophy.
- **Sections 8–9:** Project execution proposal — detailed schedule, manpower plan, inter-discipline coordination, quality and commissioning approach.
- **Section 10:** Commercial proposal — detailed Bill of Quantities, payment milestones, validity, and acceptance terms.
- **Sections 11–13:** Risk management, stated assumptions, and the inclusions/exclusions/clarifications matrix.
- **Appendices A–F:** Detailed working documents (full BOQ line items, equipment takeoff, cable schedule, panel schedule, RFI list) — provided so that your engineering and commercial teams may interrogate our basis to any depth required.

We have invested substantial engineering effort in the preparation of this proposal because we believe that the level of pre-contract clarity directly determines the smoothness of project delivery. We trust that the depth of detail will be evident in the document that follows, and we are committed to maintaining the same level of rigour through engineering, supply, installation, testing, commissioning, and handover.

Should you require any clarification, our project team is available to meet with your representatives at your convenience.

We thank you for the opportunity and look forward to your favourable consideration.

Sincerely yours,

**[Authorised signatory]**

Project Director

[BMS Contractor Company Name]

---

## 2. Executive Summary

This proposal addresses the design, supply, installation, programming, testing, commissioning, and one-year warranty support for a complete Building Management System covering the mechanical (HVAC and ventilation), plumbing/sanitary (hot water generation), boiler/laundry, casino MVAC (mechanical ventilation and air conditioning), and electrical-metering subsystems of the Kingsford Hotel Bacolod project.

### 2.1 Headline figures

Metric	Value
BMS I/O points (in scope)	<b>474</b>
BMS-monitored equipment instances	<b>59</b>
Unique equipment classes	25
BMS field panels	<b>11</b>
Estimated DDC controllers	20
Network drops (BACnet/IP + Modbus)	12
Total cable footage (estimated)	<b>2,832 m</b>
Programming objects	908
Operator graphic pages	28
Commissioning test items	450
Total project effort	<b>4,648 hr</b> (581 person-days)
Project duration	<b>16 weeks</b> from PO to handover
Peak on-site headcount	11 personnel (project weeks 9–10)
<b>Grand total proposal value (VAT-inclusive)</b>	<b>PHP 19,662,912</b>

## 2.2 Approach summary

Our proposal is structured around four design principles:

1. **Compliance with the project-specific specification.** Every BMS-monitored point in our proposal traces back directly to the TUEC BMS Points list (sheets BMS-01, BMS-02, BMS-03) or, where TUEC is silent, to the Megaworld MC Standards baseline. The traceability matrix is provided in Appendix A.
2. **Open standards and interoperability.** All controllers, head-end servers, and network equipment are based on BACnet/IP and Modbus open protocols. This avoids vendor lock-in, supports future integration with hotel building systems (PMS, FDAS, security), and aligns with Megaworld's portfolio standards for BMS.
3. **Operational reliability.** The head-end runs in redundant primary-standby configuration with 30-minute UPS protection. The network is logically isolated from the hotel's corporate LAN to protect availability. Energy-savings algorithms (chiller plant sequencing, demand control, peak shaving) are pre-engineered for hotel operating profiles.
4. **Auditable engineering.** This proposal is supported by a structured engineering basis (Bill of Quantities, equipment takeoff, cable schedule, panel schedule, programming object inventory, commissioning point inventory, manpower loading, risk register). Each is reproducible from the underlying source documents and is provided as appendices for transparent review.

## 2.3 Commercial summary

Item	PHP
Base proposal cost	13,609,435
Overhead and margin (20%)	2,721,887
Contingency reserve (7.5%)	1,224,849
Sub-total before VAT	17,556,171
VAT (12%)	2,106,741
<b>GRAND TOTAL (VAT-inclusive)</b>	<b>** 19,662,912**</b>

## 3. Project Background

### 3.1 The Kingsford Hotel Bacolod project

Kingsford Hotel Bacolod is a Megaworld Corporation development located at Manhattan Street, The Upper East, Bacolod City, Negros Occidental. The project is a mixed-use hotel and amenity facility with the following salient characteristics, as inferred from the available technical documentation:

- **Occupancy types:** hotel guestrooms (above the 3rd Floor), casino at the 2nd Level, amenity facilities at the 3rd Floor, food and beverage outlets with kitchen scope distributed from Basement to 3rd Floor, and standard hotel back-of-house operations.
- **Vertical extent:** Basement, Lower Ground Floor, Ground Floor, 2nd Floor, 3rd Amenity & Guestroom Floor, guestroom levels above, and Roofdeck.
- **Mechanical services:** centralised chilled-water plant at Ground Floor (3 chillers), condenser-water pumps and chilled-water headers at 2nd Floor pump room, cooling towers at Roofdeck, hot-water generation plants at Lower Ground and Roofdeck, steam boilers for the laundry at Lower Ground, dedicated outdoor air systems for both casino and guestroom service, precooled air handling units at Roofdeck, and air-handling units in the basement-podium back-of-house zone.
- **Electrical services:** main switchgear with multiple incoming feeders (utility, generator, automatic transfer switch), distributed sub-feeders to chiller plant, AHU plant, kitchens, lighting, hot-water plant, lifts, BMS UPS, mechanical pumps, boiler/laundry, and fire pump.
- **Project stage:** new construction, currently in detailed design and pre-procurement, with construction bulletins issued on a rolling basis (the latest electrical bulletin being No.8 dated 5 November 2025).

### 3.2 Project consultants and parties

Based on the documents provided to us, the project parties identified are:

Role	Entity	Reference
Owner / Developer	Megaworld Corporation	Title-block stamps + bulletin recipient
BMS-discipline engineer of record	R.J. Calpo & Company (Engr. Reynaldo J. Calpo, PME)	Author of the BMS Points list

Role	Entity	Reference
Electrical-discipline consultant	Mario A. Alix Philippines, Inc.	Author of EE Plan revisions
Architect	Design Alliance Architecture & Planning	Title block on EE drawings
Customer representative	Mr. Rome Amiel P. Gonzales	EE bulletin recipient

### 3.3 Note on the term ‘Rehabilitation’

Your enquiry letter (Requirement.rtf) describes the project as the *Rehabilitation of Building Management System for the Kingsford Hotel Bacolod project*. Our review of the supporting documents — both the BMS Points list and the EE Plan — confirms that they are stamped *Construction Bulletin* with dates of October–November 2025, and that the EE revisions reference *adjusted mechanical layout* and *added power provisions for kitchen layouts*. These are characteristic of a greenfield new-construction project at active design stage, not of a retrofit on an operating building. Our proposal is therefore costed on a greenfield basis and excludes any demolition, hot-cutover, or after-hours work that would be required for retrofit scope.

Should our reading of the project stage be incorrect, or should there be any retrofit elements within the scope, we will gladly revise our proposal accordingly. The clarification request is item Q-018 in our **Section 13 (Inclusions / Exclusions / Clarifications)** matrix.

## 4. Our Understanding of the BMS Scope

Our scope analysis is summarised in the following matrix, which lists each subsystem covered by the BMS Points list along with the equipment count, the I/O point count attributable to that subsystem, and the field panel(s) serving it.

### 4.1 Subsystem coverage matrix

Subsystem	Equipment instances	I/O points	Reference
Ventilation	6	108	A1 + A2

Subsystem	Equipment instances	I/O points	Reference
Chilled Water Plant	9	90	A1 + A2
Air Conditioning	6	84	A1 + A2
Power Monitoring	9	48	A1 + A2
Condenser Water Loop	7	34	A1 + A2
Boiler	2	32	A1 + A2
Casino Air Conditioning	3	31	A1 + A2
Exhaust	9	27	A1 + A2
Hot Water	8	20	A1 + A2
<b>Total</b>	<b>59</b>	<b>474</b>	

## 4.2 Subsystem narratives

### 4.2.1 Chilled Water Plant

The chilled-water plant comprises **three packaged water-cooled chillers** (CH-1, CH-2, CH-3) located at Ground Level in the chiller plant room. Each chiller is BMS-monitored via its native BACnet/IP gateway, exposing approximately twenty-four data points covering compressor status, motor load current, energy consumption, refrigerant pressures and temperatures (evaporator and condenser sides), oil pump status and oil-sump conditions, winding temperature, and the approach delta temperature and pressure for both heat exchangers.

The plant interfaces with **four primary chilled-water pumps** (PCHWP-1 through PCHWP-4, comprising three duty units plus one standby per A-CHW-001) located in the 2nd Floor pump room, each driven by a variable-frequency drive that reports speed and accepts speed command via BACnet HLI. The plant is hydraulically separated from the secondary loop by a CHW header set with supply/return temperature and pressure sensors, a differential-pressure sensor across the bypass line, and a BMS-supplied motorised bypass valve.

Heat rejection is via **three condenser-water pumps** (COMP-1 through COMP-3) at the 2nd Floor pump room, sequenced to the chillers, and **three cooling towers**

(CT-1, CT-2, CT-3) at Roofdeck. Cooling-tower fan staging is controlled per condenser-water leaving temperature; basin-level alarms and motorised blowdown valves are BMS-supervised. The cooling-tower area shares a common outdoor-air temperature and humidity sensor for control of the wet-bulb-driven sequence.

A plant-level BTU meter (BTU-CHWS-MAIN) provides cumulative energy and instantaneous flow on the supply leg, integrated via Modbus.

#### 4.2.2 Air Handling Units

Air handling unit scope comprises:

- **Basement-Podium Back-of-House Air Handling Units (CHWP-1.1 / 1.2 / 1.3 at Ground Level):** Three units, each chilled-water-served with VFD-driven supply fan, modulating CHW valve (ME-supplied), outdoor and return-air motorised dampers (ME-supplied), and BMS-supplied sensors for supply/mixed/return air temperature, supply air humidity, and indoor return-air CO<sub>2</sub> (for demand-controlled ventilation). Each unit has a BACnet/IP-native VFD interface for fan speed and control.
- **Casino-serving Air Handling Units (AHU-2M.1 / 2M.2 at 2nd Level):** Two units of similar architecture to the BOH AHUs, but with modulating dampers (position feedback as analogue input) and additional CO/CO<sub>2</sub> sensors at the return duct to manage indoor air quality in the casino environment. Each AHU is paired with an air-treatment ozonizer (OZ-2M.1 / OZ-2M.2) which BMS monitors for status, trip alarm, and downstream VOC level.

*Note: The TUEC tabulation indicates a total of ten BOH air handling units, of which only the three at Ground Level (CHWP-1.1/1.2/1.3) are explicitly tag-listed in the points list provided to us. The remaining seven units are identified by aggregate point counts but not by individual tag or location. The base proposal covers the three confirmed units; the additional seven are excluded pending receipt of the complete BOH AHU schedule. Refer to clarification Q-021.*

#### 4.2.3 Dedicated Outdoor Air Systems

Three DOAS units are in scope:

- **DOAS-2W (Casino MVAC at 2nd Level):** Provides conditioned outdoor air to the casino with energy recovery, modulating CHW coil, motorised

dampers, and full BACnet/IP integration. Includes upstream ozonizer monitoring.

- **DOAS-RD.1 and DOAS-RD.2 (Hotel/Roofdeck DOAS serving guestroom-level fresh air):** Two units at Roofdeck providing outdoor-air supply to the upper guestroom levels with similar control architecture.

Each DOAS unit is treated as a single equipment instance with twenty-five points covering supply and exhaust fan status/HOA/trip/VFD speed/control, outdoor-air dry-bulb temperature and flow and humidity sensors, indoor mixed-air temperature and humidity, supply-air temperature, exhaust-air temperature, outdoor-air motorised damper status and command, CHW modulating valve status and command, and exhaust-fan static-pressure transmitter.

#### 4.2.4 Precooled Air Handling Units (Roofdeck)

Two PAHU units at Roofdeck (PAHU-RD.1, PAHU-RD.2) condition outdoor air upstream of distribution to other AHUs/DOAS within the building. Each PAHU has a single-direction airflow path (no exhaust), VFD-driven fresh-air fan, modulating CHW coil and outdoor-air damper, and standard fan status/trip/HOA monitoring. Each provides a BACnet/IP gateway connection to the BMS.

#### 4.2.5 General Ventilation

The general ventilation system comprises **sixty-eight exhaust fans** distributed across five building zones:

Zone	Fans	Composition
Ground Floor — Main Lobby	9	4 toilet exhaust + 5 general exhaust (LPG, mechanical room, storage, main rest room, etc.)
2nd Floor	13	3 toilet + 4 general (basement service, GS) + 6 general (chiller room, EF-2.x)
3rd Floor — Amenity & Guestroom	27	25 toilet exhaust (3A×2, 3B, 3C×2, 3D×20 for guestroom-block toilets) + 2 general exhaust
Basement zone	16	2 toilet + 7+7 general (mechanical room, heat-pump room, pump rooms, MFP)
Roofdeck zone	3	3 general exhaust

Each fan is monitored for motor status, hand/off/auto status, and trip alarm via auxiliary contacts at the fan starter. The TUEC tabulation indicates 181 digital

inputs across the ventilation scope, while a strict 3-DI-per-fan pattern would yield 204; this 23-DI variance is reconciled by assuming that some smaller basement-zone and roofdeck fans use a 2-DI pattern (motor status + trip, no HOA) — refer to assumption A-VENT-001.

#### 4.2.6 Plumbing / Sanitary Hotwater System

The hotwater system comprises six **calorifiers** (HWT-LZ-1/2/3 at Lower Ground and HWT-HZ-1/2/3 at Roofdeck), each monitored for tank temperature; six **heat pumps** providing primary heating (HP-LZ-1/2/3 + HP-HZ-1/2/3); and six **recirculating pumps** (RP-LZ-1/2/3 + RP-HZ-1/2/3) maintaining hotwater circulation. Each pump set is monitored for motor status, hand/off/auto status, and trip alarm. The Lower Ground and Roofdeck plants each have a hot-water header set with supply/return/make-up cold-water temperature monitoring.

Per assumption A-PL-001 — supported by the TUEC tabulation showing eighteen digital inputs and eighteen high-level interface points across the eighteen pump status types — Lower Ground pumps are wired as hardwired digital inputs to the local BMS panel (PNL-PL-LZ), while Roofdeck pumps are routed via an equipment-supplier-provided high-level interface gateway to the local BMS panel at Roofdeck (PNL-PL-HZ). This assumption matches the project's I/O totals exactly and may be revised when the equipment vendor's panel architecture is confirmed.

#### 4.2.7 Boiler / Laundry System

Two steam boilers (SB-1, SB-2) at Lower Ground supply steam to the laundry. Each boiler has sixteen monitored points: BMS-supplied steam pressure transmitter and feedwater temperature sensor, fluegas temperature sensor, fluegas oxygen sensor, plus equipment-supplier-provided auxiliary contacts for low/high water level, burner power, small/big fire control signals, waterfeed pump status, burner status and burner-running status, blower motor status, and fuel-oil pump status. The BMS-supplied motorised blowdown valve is commanded by digital output from the boiler-room BMS panel.

#### 4.2.8 Electrical Metering

The electrical metering scope follows the project's *Electrical Maximum Demand Control* requirement (BMS general specification) and assumption A-EE-001:

- **Three multifunction main-switchgear meters** (MTR-MAIN-1/2/3) at the main switchgear room, covering utility, generator, and ATS/bus-tie incomers

- **Ten sub-feeder meters** (MTR-FDR-01..10) at major distribution panels covering the chiller plant, AHU plant, kitchen, lighting, hotwater plant, lifts, BMS UPS, mechanical/pumps, boiler/laundry, and fire pump

Each meter is integrated via Modbus RTU/IP and exposes five high-level interface sub-points to the BMS: instantaneous active power (kW), cumulative energy (kWh), reactive power (kVAR), three-phase RMS-average voltage (V), and three-phase RMS-average current (I). Two Modbus serial-to-IP gateways aggregate the meters at the main switchgear and distribution rooms respectively.

---

## 5. Technical Proposal

### 5.1 System architecture

The BMS is implemented as a three-tier architecture aligned with the BMS general specification on sheet BMS-01:


**Tier 1 — Head-End (server room):** - Redundant primary–standby BMS server pair hosting the BMS application, point database, alarm and event management, trending, scheduling, reporting, and graphics rendering - Two operator workstations (chief engineer and front-desk / shift staff) - One graphics PC driving a 55-inch commercial display for control-room situational awareness - Online double-conversion 3 kVA UPS providing 30 minutes of full-load runtime - Server-room peripherals: KVM switch, console monitor, color laser network printer (alarm printer per spec), 19-inch equipment rack

**Tier 2 — Network:** - One managed Layer-2/Layer-3 core switch at the server room, providing BACnet routing, VLAN, SNMP, NTP, and the single uplink to the customer’s corporate LAN - Six edge managed Layer-2 switches at the floor / zone IDFs (Lower Ground, Ground, 2nd Floor, 3rd Floor, Basement, Roofdeck) - Riser fibre — OM3 multimode 6-strand armoured — totalling 300 m across six risers, with 14 fibre transceivers (paired) - Cat6 patch and permanent links to BMS panels and BACnet/IP-native equipment (chillers, AHUs, DOAS, PAHU, BTU meter)

**Tier 3 — Field:** - 18 BMS field panels distributed across plant rooms and floor-level zones - ~30 DDC controllers (1 per ~40 physical I/O, plus network gateway controllers where panels host BACnet/Modbus integration) - BMS-supplied sensors, BMS-supplied modulating valve actuators where applicable, and

termination of equipment-supplier-provided auxiliary contacts and ME-supplied valve/damper actuators

## 5.2 Network architecture and switch schedule

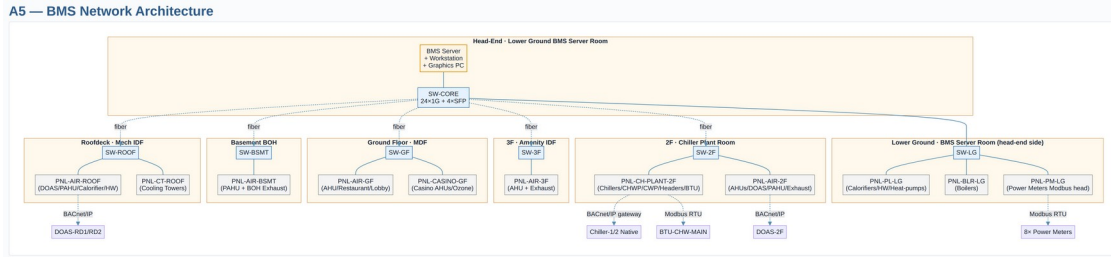

### BMS Network Architecture

*Star-and-tree topology centred on the BMS Server Room core switch, with riser fiber to floor/zone edge switches and Cat6 drops to BMS panels and BACnet/IP equipment. Source-of-truth: 05-working-docs/A5-network-architecture.md.*

Switch	Location	Ports	Connects
<b>CORE</b>	BMS Server Room	24 + 4 SFP	Servers ×2, WS ×2, Graphics PC, Printer, riser fibre to 5 edge switches, customer-LAN uplink
<b>SW-LZ</b>	Lower Ground / Pump room	8 + 2 SFP	PNL-PL-LZ, PNL-BL-LZ
<b>SW-GND</b>	Ground / BOH	16 + 2 SFP	PNL-CH-PLANT-GND, PNL-CHWP-GND, PNL-VENT-GF, PNL-EE-MAIN, CH-1/2/3
<b>SW-2F</b>	2nd Floor IDF	16 + 2 SFP	PNL-CHWP-L2, PNL-VENT-L2, PNL-AHU-L2, PNL-DOAS-L2, PNL-EE-DIST, AHU-2M.1/2, DOAS-2W, BTU meter
<b>SW-3F</b>	3rd Floor IDF	8 + 2 SFP	PNL-VENT-L3
<b>SW-BSMT</b>	Basement	8 + 2 SFP	PNL-VENT-BSMT
<b>SW-RD</b>	Roofdeck IDF	16 + 2 SFP	PNL-PL-HZ, PNL-CT-RD, PNL-VENT-RD,

Switch	Location	Ports	Connects
			PNL-DOAS-RD, PNL-PAHU-RD, DOAS-RD.1/2, PAHU-RD.1/2

The IP plan uses a flat /24 BMS subnet (10.10.50.0/24) with static-block allocation: servers .10–.19, switches .20–.29, controllers .50–.99, BACnet/IP equipment .100–.199, power-meter gateways .200–.219. The BMS LAN does not route to the corporate LAN; remote access is via VPN through the customer’s firewall (subject to clarification Q-012).

### 5.3 Head-End hardware and software

The head-end equipment list is summarised below. Detailed specifications are provided in Appendix B.

ID	Description	Qty
HE-001	BMS server class — 1U/2U rack mount, redundant PSU, dual NIC, RAID-1 SSD storage 480 GB, 32 GB RAM (Niagara/Ametek/Honeywell EBI/Tridium-ready)	1
HE-002	Operator workstation — 24-inch monitor, mid-range PC (i5/16GB/256GB SSD), Windows 11 Pro	1
HE-003	Graphics/Engineering PC — i7/32GB/512GB SSD, dual-monitor config (2× 27-inch)	1
HE-004	Online double-conversion UPS, 3 kVA / 2.7 kW, 30-min runtime at full load (APC SRT3000XLI / Eaton 9PX equivalent)	1
HE-005	42U server rack — 800×1000 mm with cable management arms, lockable doors, integrated PDUs	1
HE-006	24-inch display — IPS, 1920×1080	2
HE-007	8-port KVM switch — IP-capable for remote console access	1
HE-008	Network laser printer — A4 monochrome (HP LaserJet equivalent)	1

**Total head-end items:** 8 line items, 9 units. Total continuous power: 2,150 W (head-end) + 75 W (core switch) = 2,225 W; UPS-protected.

## 5.4 BMS Field Panel Schedule

Eighteen BMS field panels are deployed as follows. Each panel summary lists I/O density, controller count, and approximate power consumption.

Panel	Location	Equipment Served	Physical			Controllers	Power (W)
			I/O	HL I	Net		
PNL-AIR-2F	2F Common Public	7 units	70	4	1	2	55
PNL-AIR-3F	3F Amenity	3 units	20	0	0	1	25
PNL-AIR-BSMT	Basement BOH	3 units	18	0	0	1	25
PNL-AIR-GF	Ground Floor Lobby / Ground Floor Restaurant	5 units	34	4	1	2	55
PNL-AIR-ROOF	Roofdeck DOAS	7 units	70	0	0	2	50
PNL-BLR-LG	Lower Ground Boiler Room	3 units	32	4	1	2	55
PNL-CASI-NO-GF	Ground Floor Casino / Ground Floor	5 units	45	4	1	2	55

Panel	Location	Equipment Served	Physical I/O	HL I	Net	Controllers	Power (W)
	Casino Lobby						
PNL-CH-PLAN T-2F	2F Chiller Plant Room	13 units	59	44	4	2	70
PNL-CT-ROOF	Roofdeck Cooling Tower	5 units	22	4	1	2	55
PNL-PL-LG	Lower Ground Boiler Room / Lower Ground Calorifier Room	7 units	13	8	2	2	60
PNL-PM-LG	Lower Ground Main Switchgear	1 units	0	7	1	2	55
<b>Totals</b>		<b>59 units</b>	<b>383</b>	<b>79</b>	<b>12</b>	<b>20</b>	<b>560</b>

Each panel is housed in an IP54 wall-mount metal enclosure with internal DIN-rail-mounted DDC controllers, I/O modules (16-channel AI/AO/DO and 32-channel DI), 24 VDC switching power supply, terminal blocks, signal-level surge protection, and standard cable management. Plant-room critical panels (six panels) include redundant power supplies.

## 5.5 Cable Schedule Summary

The cable schedule is generated from the panel-to-device topology assuming a 30 m average panel-to-device run length and an 80 m horizontal-trunk-per-floor

allowance (per assumption A-001). Refinement is expected against architectural and mechanical layouts.

Cable category	Count	Length (m)
Field cables (panel ↔ device)	96	1,870
Network/MS-TP backbone trunks	6	730
240V panel power feeds	11	232
<b>Grand total</b>	<b>113</b>	<b>2,832</b>

Cable type breakdown (field cables only):

Cable type	Length (m)
4C × 1.5 mm <sup>2</sup> FRLS (equipment aux contacts — status/HOA/trip)	781
4C × 1.5 mm <sup>2</sup> shielded FRLS (BMS signal — sensors)	507
4C × 1.5 mm <sup>2</sup> FRLS (ME-supplied valves/dampers — status + control)	384
Cat6 4P × 23 AWG U/UTP, FRLS jacket (BACnet/IP)	198

All control and signal cables are FRLS (Fire Retardant, Low Smoke) per Philippine fire-safety code. Approximately 30 % of the total cable runs are in BMS-installed branch conduit; the remainder uses ME-contractor-provided cable trays in plant rooms (subject to Q-008).

## 5.6 Power Provisions Schedule

Twenty-five 240 V single-phase circuits are required to be provided by the Electrical Contractor for energising the BMS scope:

- 18 circuits to the BMS field panels (field-panel total estimated load: 880 W)
- 1 circuit at 32 A to the head-end UPS input (head-end total estimated load: 1080 W, UPS-protected)
- 6 circuits to the network edge switches (edge total estimated load: 320 W)

**Total estimated continuous BMS load: 2280 W.** A detailed power-provisions schedule is included with our submittal package, listing the source panelboard, breaker rating, and circuit identification expected per BMS panel.

## 5.7 Programming and Configuration Approach

The programming scope is structured around the following object inventory derived from the I/O list and the description-of-operations text in the points list:

Object class	Count
Point database objects (per AI/AO/DI/DO/HLI)	462
Control loops (one per equipment with active control)	33
Alarm definitions (with priority, routing, and message)	63
Trend logs	332
Schedules (occupancy, system on/off, setbacks)	8
Scheduled reports (daily / weekly / monthly)	10
<b>Total programmable objects</b>	<b>908</b>

**Estimated programming effort:** 174 hours (22 person-days). This is delivered by a single BMS engineer working in parallel with site installation during weeks 4–13.

Control logic for each piece of equipment is built directly from the *Description of Operations* narrative in the points list — for example, the chilled-water plant sequencing follows the BMS-03 Process and Instrumentation Diagram for Primary Chilled Water and Condenser Water, and the cooling-tower fan staging follows BMS-03’s Cooling Tower P&ID with its 14 monitor & record items, alarm definitions, and runtime/status reporting.

## 5.8 Operator Graphics and Reports

A total of **28 graphic pages** are developed: 9 simple (alarm summary, trend, dashboards), 13 medium (per-floor, per-system, equipment-popup templates), and 6 complex (home page, full chiller-plant overview, full AHU/DOAS popup templates, full Boiler popup, energy-savings dashboard).

Navigation principles: - The home page provides at-a-glance KPIs and click-through to floor or system pages. - Per-floor pages display building plans with equipment overlays at their physical locations. - Per-system pages display Process and Instrumentation Diagram-style flows with all equipment in the system. - Equipment-popup templates are reused across instances (e.g., one Chiller template instantiated for CH-1, CH-2, CH-3) to ensure consistency and minimise programming duplication. - Consistent colour coding is used: green = running normal, yellow = warning, red = alarm/fault, grey = stopped or in auto.

**Estimated graphics development effort:** 256 hours (32.0 person-days), delivered by a graphics engineer during weeks 4–13.

## 5.9 Testing and Commissioning Approach

Testing and commissioning is delivered in five sequential layers:


1. **Pre-commissioning** (week 12): cable-continuity testing, megger testing where applicable, panel power-up smoke tests on all 18 panels.
2. **Point-to-point (P2P) testing** (week 13, ~57 hr): every one of the 383 physical I/O points is verified for calibration, range, polarity, and database scaling. P2P is conducted panel-by-panel to localise issues.
3. **Functional testing** (week 14, ~88 hr): each of the 59 equipment instances is verified against its description-of-operations sequence (e.g., CHW valve modulation maintains supply-air temperature).
4. **Integrated commissioning** (week 15, ~32 hr): 8 cross-system sequences are validated together — chiller plant staging, CHW differential-pressure control, AHU supply-air temperature loops, DOAS demand-controlled ventilation, hotwater system sequencing, boiler firing rate, cooling-tower fan staging, and energy-savings algorithm verification.
5. **Owner T&C / SAT** (week 15) and **Snagging / Punch-list** (weeks 15–16): formal Site Acceptance Test with the Owner’s representative, followed by punch-list resolution and as-built documentation.

**Total T&C effort:** 178 hours (22 person-days). Plus 80 hours allocated for as-built documentation (panel general arrangements, cable schedule, riser, network architecture, O&M manuals, point database export, programming and graphics archive).

---

## 6. Project Schedule

The proposed schedule covers 16 weeks from Purchase Order to Handover, with critical milestones at weeks 4, 6, 12, 15, and 16. The visual Gantt below is auto-generated from the structured schedule (D1) and re-renders on every refresh:

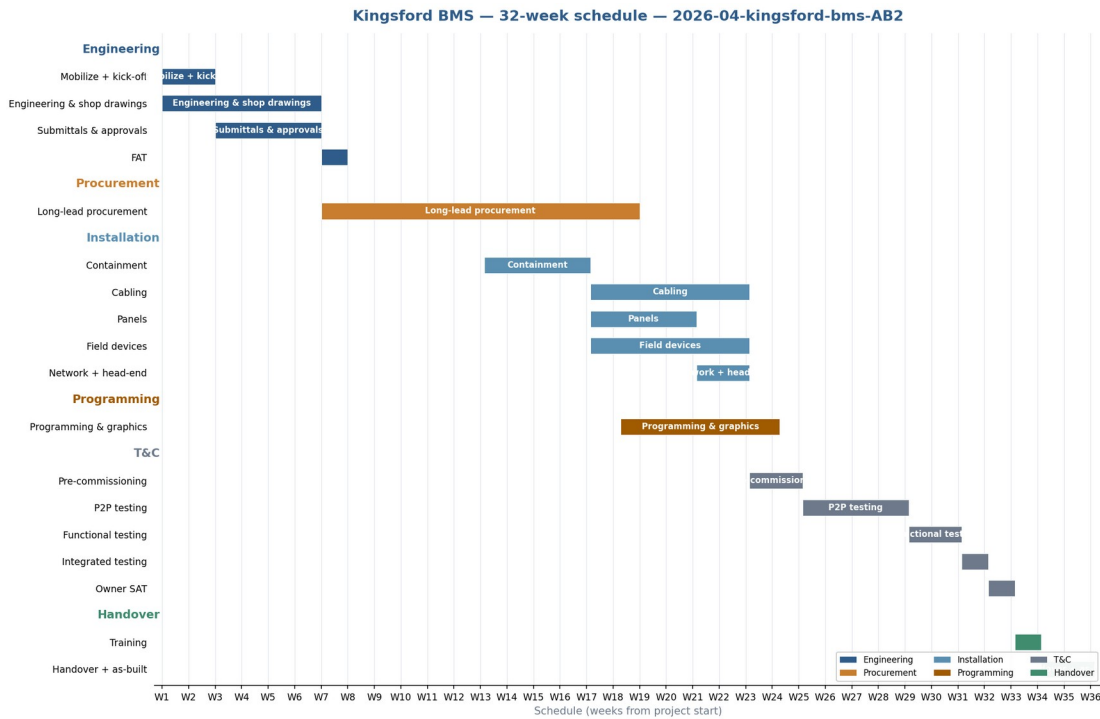

### Project schedule — visual Gantt

Sections colour-coded by lifecycle phase (PM & Engineering, Supply, Installation, Programming, T&C, Handover); milestones shown as diamonds. Source-of-truth: 05-working-docs/D1-schedule.md.

Wk	Phase	Key activities
1	Mobilization + Engineering	Site mobilization, kick-off meeting, engineering team starts, first MEP coordination meetings
2	Engineering	Panel layouts, IO list submittal, control sequence design, network design
3	Engineering	Continued; submittals package #1 (head-end + network) issued
4	Engineering / Supply	Engineering wraps; submittals package #2 (panels + sensors); long-lead supply orders

Wk	Phase	Key activities
		placed
5	Supply / FAT	Standard supply orders placed; FAT preparation; head-end FAT in vendor facility
6	Supply	Cables, conduit, sensors arrive on site; staging
7	Installation	First-fix containment in plant rooms; head-end server-room build-out begins
8	Installation	Plant-room cable pulling; head-end installation continues; network core switch in place
9	Installation	Plant-room device installation + termination; floor-level first-fix on multiple floors
10	Installation	Floor-level cable pulling (all floors); plant-room pre-comm checks begin
11	Installation	Floor-level device install + termination; head-end software config
12	Installation / T&C	Final installation tasks; pre-commissioning sweeps; programming + graphics nearing completion
13	T&C	Point-to-point testing per panel; programming + graphics complete; integration tests start
14	T&C	Functional testing per system
15	T&C	Integrated commissioning; Owner T&C / SAT
16	Handover	Operator training (16 hrs over 2 days); as-built drawings + O&M handover; warranty start

### Critical milestones:

- **Week 4:** Engineering complete, all submittals issued.
- **Week 6:** All supply on site.
- **Week 7:** Site installation start (mobilization).
- **Week 12:** Installation complete (mech-ready for T&C).
- **Week 14:** Functional testing complete.
- **Week 15:** SAT complete.
- **Week 16:** Handover, warranty start.

## 7. Manpower Plan

Total project effort: **4,648 hours (581 person-days)** across the project duration. Manpower is loaded as follows, with peak headcount of 11 personnel on site during weeks 9–10:

Wk	PM	Eng	Wireman	Tech	Graphics	Total
1	1	2	0	0	0	3
2	1	2	0	0	0	3
3	1	2	0	0	0	3
4	1	2	0	0	0	3
5	1	1	0	0	0	2
6	1	1	0	0	0	2
7	1	1	4	0	0	6
8	1	1	6	1	1	10
9	1	1	6	2	1	<b>11</b>
10	1	1	6	2	1	<b>11</b>
11	1	1	4	2	1	9
12	1	1	2	3	1	8
13	1	1	1	3	1	7
14	1	1	0	3	0	5
15	1	2	0	2	0	5
16	1	1	0	1	0	3

Effort budget by phase:

Phase	Hours	Person-days
Engineering & Design (1.2)	320	40
Project Management (1.1, 3.1)	720	90
Submittals & FAT (1.3, 1.4)	120	15
Installation (3.0)	1435	179
Programming (4.1)	174	22

Phase	Hours	Person-days
Graphics (4.2)	256	32
Testing & Commissioning (5.x)	178	22
SAT + Documentation + Training (5.5–5.7, 6.x)	200	25
<b>Total</b>	<b>~4,648</b>	<b>~581</b>

## 8. Inter-Discipline Coordination

BMS scope interfaces with multiple disciplines on the project. The following matrix summarises the demarcation points and the items requiring coordination meetings:

**BMS ↔ Mechanical Contractor:** - BMS supplies wiring and termination of motorised iso valves on chillers and cooling towers (CHW + COW R&S); ME supplies the valves and actuators. - BMS supplies wiring, termination, and AO command for AHU modulating CHW valves; ME supplies the valves and actuators. - BMS supplies wiring and AO/DI for AHU and DOAS dampers (OA, RA); ME supplies the dampers and actuators. - BMS supplies HLI integration to AHU/DOAS/PAHU VFDs; Equipment Supplier supplies the VFDs with BACnet/Modbus interface cards. - BMS reads pump/fan/heat-pump auxiliary contacts (motor status, HOA, trip); Equipment Supplier provides aux contacts at the equipment terminal block. - BMS supplies thermowells and temperature sensors on CHW pipework; ME provides pipe bosses for the thermowells.

**BMS ↔ Electrical Contractor:** - EE Contractor provides 25 dedicated 240 V single-phase circuits to BMS panels and head-end UPS input per A7 power schedule. - BMS supplies multifunction power meters (13 units) and CTs (39 units); EE provides switchgear cutouts and CT installation coordination. - BMS supplies internal panel distribution (DIN-rail breakers, terminal blocks, surge protection); EE supplies the feeder cables and breakers.

**BMS ↔ IT / Customer Network:** - BMS LAN is logically isolated from the customer's corporate LAN. - Single 1 Gbps uplink at the core switch to a customer-

provided network drop in the customer's IT closet, subject to firewall configuration. - Customer IT provides DNS allocation, NTP source (or time synchronization to local Internet time), and any VPN access for vendor remote support.

**BMS ↔ Civil / Architectural:** - BMS provides panel and equipment locations in submittal drawings. - Civil provides wall penetrations, fire-stopping, panel-room access doors, and the server-room build-out (walls, finishes, cooling, fire suppression).

---

## 9. Quality Management

### 9.1 Quality framework

Our quality framework follows industry standards expected by Megaworld for hotel projects:

- **Engineering quality:** all submittals pass internal peer review prior to issuance; all panel general arrangement drawings are signed off by the BMS engineer of record before fabrication.
- **Material quality:** Tier-1 brand selection, factory-tested controllers, FRLS-compliant cabling per fire code, IP54 indoor enclosures.
- **Installation quality:** site supervision by a BMS technician at all times during cable pulling and panel installation; daily quality logs maintained.
- **Commissioning quality:** P2P testing 100 % coverage of physical I/O; functional testing 100 % coverage of equipment; integrated commissioning of all cross-system sequences.
- **Documentation quality:** as-built drawings, O&M manuals, point database export, and programming/graphics archive delivered before handover acceptance.

### 9.2 Factory Acceptance Test

Prior to site mobilization, a Factory Acceptance Test is conducted at the BMS vendor's facility (week 5). The FAT covers:

- Demonstration of controller programming with simulated I/O
- Demonstration of representative graphics pages (home page, sample equipment popup, alarm summary)

- BACnet integration with a sample equipment vendor's panel (typically a chiller controller demo)
- Validation of redundancy failover at the head-end
- Acceptance signed by the customer's engineering representative

### 9.3 Site Acceptance Test

After integrated commissioning at week 15, the Site Acceptance Test (SAT) is conducted. The SAT covers:

- Full operator walkthrough of all graphic pages with the customer's chief engineer
- Live demonstration of three random equipment functional sequences
- Live demonstration of one cross-system integrated sequence (typically chiller plant staging)
- Demonstration of energy-savings algorithm with sample scenarios
- Alarm propagation and acknowledgment workflow
- Acceptance signed by the Owner's representative; warranty period commences

### 9.4 Warranty

The warranty period is **one year from manufacturer (per equipment vendor warranty) plus one year of on-site defect liability** by ourselves. During the on-site defect liability period:

- Site visits in response to fault calls within 24 hours of report
- Replacement of any defective BMS-supplied component at no charge
- Programming or graphics adjustments at no charge
- Software updates to the BMS server software within the manufacturer's release schedule
- Telephone support during business hours

Optional 1-year preventive-maintenance contract is available as an extension after the warranty period.

---

## 10. Commercial Proposal

### 10.1 Pricing summary

Item	PHP
Base proposal cost (material + labor + services)	13,609,435
+ Overhead and margin (20%)	2,721,887
+ Contingency reserve (7.5%)	1,224,849
Sub-total before VAT	17,556,171
+ VAT (12%)	2,106,741
<b>GRAND TOTAL (VAT-inclusive, PHP)</b>	<b>** 19,662,912**</b>

### 10.2 Cost breakdown by section

WBS	Section	Subtotal (PHP)	% of base
1.0	Project Management & Engineering	1,688,000	12.4%
2.0	Material Supply	10,204,670	75.0%
3.0	Installation	749,875	5.5%
4.0	Programming & Configuration	490,160	3.6%
5.0	Testing & Commissioning	385,530	2.8%
6.0	Training & Handover	91,200	0.7%
	<b>Base total</b>	<b>** 13,609,435**</b>	<b>100.0%</b>

### 10.3 Cost pool breakdown

Pool	Subtotal (PHP)	% of base
Material	9,258,670	68.0%
Labor	3,184,765	23.4%
Service/Lot	1,166,000	8.6%

## 10.4 Optional items (priced separately on request)

Item	Pricing basis
1-year preventive maintenance contract (post-warranty)	Quote on request
FDAS integration (subject to FDAS vendor specs)	Quote on request
PMS integration (guestroom occupancy → FCU control)	Quote on request, subject to FCU scope confirmation
Additional administrator training (8 hr session)	~PHP 30,000 per session
Vendor factory training (overseas)	Quote on request, varies by vendor and location
Spare-parts inventory beyond warranty stock	5% of critical-replacement items, quote on request

## 10.5 Payment milestones

We propose the following payment schedule (subject to customer's commercial terms):

Milestone	%	Trigger
Mobilization advance	10%	Upon PO + signed contract
Engineering complete	15%	Submittals approved (Week 4)
Long-lead materials delivered	25%	Site delivery (Weeks 5–6)
Standard materials delivered	20%	Site delivery (Weeks 6–7)

Milestone	%	Trigger
Installation complete	15%	Mech-ready at Week 12
T&C complete + SAT	10%	Customer SAT signed (Week 15)
Handover + warranty start	5%	Documentation accepted (Week 16)
<b>Total</b>	<b>100%</b>	

## 10.6 Validity and acceptance

This proposal is valid for **90 days** from the date of issue (2026-04-28).

To accept this proposal, please countersign the acceptance block in **Section 14** or issue your standard Purchase Order referencing this proposal document.

---

## 11. Stated Assumptions

The following assumptions form the basis of this proposal. We have tagged them with their cost-impact-if-wrong so that you may readily identify which ones materially affect pricing or schedule. Should any need to be revised, we will gladly amend the proposal.

### Project context assumptions:

1. **Project stage — Greenfield (new construction).** Our base proposal is priced for new-construction scope. *If retrofit elements are included, pricing is revised — typically +30% for demolition, hot cutover, and after-hours work.*
2. **Required project duration — 16 weeks from Purchase Order to Handover.** *If a shorter duration is required, we re-plan with augmented crew and overtime — typically +20–30% on labor.*
3. **Working hours — Standard daytime construction (8 am–5 pm Mon–Sat).** No night-work or special-access premium has been priced.
4. **Site mobilization access:** unobstructed access to all plant rooms and floors as MEP installation progresses, per standard greenfield sequencing.

### Scope assumptions:

5. **BMS scope coverage — Per the project-specific points list (TUEC).** Items not in the points list (e.g., per-guestroom Fan-Coil Unit controls, domestic cold-water booster pumps) are *not* in our base scope. *If FCU scope is confirmed in scope, +30–40% on BMS scope.*
6. **Brand selection — Tier-1 BACnet/IP equipment per the BMS general specification.** *Specific brand will be selected per Megaworld portfolio standardization once confirmed.*
7. **Cable lengths — Estimated at 30 m average panel-to-device run plus 80 m horizontal trunk per floor.** Refinement is expected when complete architectural and mechanical layouts are made available.
8. **Quantity of BOH AHUs — Three units (CHWP-1.1/1.2/1.3) at Ground Level.** The TUEC tabulation indicates a total of ten BOH AHUs but only three are tag-listed. *Additional AHUs, if confirmed, are priced separately.*
9. **Plumbing pump status routing:** Lower-Ground pumps wired as hardwired DI, Roofdeck pumps via equipment-panel HLI. Total point count is unaffected; if assumption is revised, panel I/O module sizing may shift.
10. **Power metering — 13 multifunction meters (3 main + 10 sub-feeder).** *Refined upon receipt of complete electrical drawing set.*

#### **Network and integration assumptions:**

11. **Network architecture — Isolated BMS LAN, flat /24 subnet, single uplink to customer's corporate LAN.** No VLAN segmentation in base proposal.
12. **Integration scope — None with PMS / FDAS / CCTV / ACS in base proposal.** Each integration is available as a priced option.
13. **Customer LAN uplink:** Customer IT provides one 1 Gbps drop into the BMS server room with appropriate firewall rules.

#### **Commercial assumptions:**

14. **Payment terms:** 30-day net.
  15. **Retention:** 10% retention released at handover.
  16. **Warranty:** 1-year manufacturer warranty + 1-year on-site defect liability.
  17. **Liquidated damages:** none included in base.
  18. **Currency:** PHP-denominated.
  19. **VAT:** 12% applied to the grand total per Philippine tax code.
-

## 12. Risk Management

Our risk register identifies thirteen project risks, of which five are scored Medium/High likelihood × High impact (score 6/9). Our mitigation strategies are summarised below:

Risk	Likelihood × Impact	Mitigation
<b>Scope expansion via FCU confirmation</b>	M × H	Explicit FCU exclusion in inclusions; if confirmed, priced as discrete add-on with separate WBS branch and BOQ
<b>Long-lead chiller controller / equipment delivery slip</b>	M × H	Day-1 PO ordering; expedite premium budgeted as contingency; Tier-2 alternative supplier identified during RFQ
<b>Existing BOH AHU schedule incomplete</b>	H × M	Base scope covers 3 confirmed AHUs; 7 additional priced as option pending confirmation
<b>MEP contractor sequencing delays</b>	H × M	Weekly coordination meetings from Week 1; MEP hand-over dates submitted with engineering submittals; 1-week internal slack embedded in installation phase
<b>Customer schedule pressure</b>	M × H	Q-007 surfaced immediately; if shorter required, propose with

Risk	Likelihood × Impact	Mitigation
<b>(&lt; 16 weeks required)</b>		explicit overtime + crew premium
Site survey discovers unforeseen conditions	L × H	Site survey before T&C; if retrofit, contingency reserve 5% in BOQ
FAT failure (programming bug)	L × M	Internal pre-FAT in vendor facility; 1-2 week recovery if needed
Brand standardization affects supplier lock-in	L × M	Multi-brand RFQ in Phase 9 (parallel quotes); flexibility in pricing
Commercial terms tighter than assumed	M × M	LD risk priced as 1–2% contingency
Insufficient cable length per A-001	L × M	Material BOQ +10% safety margin
Network/IT firewall delays	M × L	IT coordination meeting in Week 4–5; BMS LAN can operate isolated for T&C if needed
Insufficient contingency	(always present)	7.5% contingency baked into the proposal

Risk	Likelihood × Impact	Mitigation
cy reserve FDAS / PMS / CCTV / ACS integratio n scope creep	M × M	Explicit exclusion in proposal; each integration offered as discrete priced option

## 13. Inclusions / Exclusions / Clarifications

### 13.1 Inclusions

Per Sections 4–9 (Project Understanding, Technical Proposal, Project Execution). All material supply, installation, programming, testing, commissioning, training, and warranty support for the BMS system as described.

### 13.2 Exclusions

The following are NOT in our base proposal scope. They are either supplied by other contractors, civil works, or hotel building systems beyond the BMS perimeter:

Item	Reason for exclusion
Mechanical equipment supply (chillers, cooling towers, pumps, AHUs, DOAS, PAHU, fans, calorifiers, heat pumps, recirculating pumps, boilers, ozonizers)	Mechanical Contractor / Equipment Supplier scope
Mechanical valves and	Mechanical Contractor scope

Item	Reason for exclusion
dampers (motorised iso valves, modulating CHW valves on AHUs/DOAS, OA/RA dampers)	
VFDs and motor starters	Equipment Supplier scope
Switchgear, MCCs, panelboards, breakers	Electrical Contractor scope
240 V power circuits to BMS panels and head-end UPS input	Electrical Contractor scope (per A7 schedule provided to EE)
Civil works (panel plinths, core drilling, server-room build-out, finishes)	Civil Contractor scope
FDAS integration	Excluded pending integration scope confirmation
PMS / CCTV / ACS integration	Excluded pending integration scope confirmation
Per-guestroom FCU controls	Excluded pending FCU scope confirmation
Domestic cold- water booster pump monitoring	Excluded pending Q-020
Demolition /	N/A for greenfield

Item	Reason for exclusion
removal of existing equipment	
1-year preventive maintenance contract	Available as priced option
Vendor factory training (overseas)	Available as priced option
Spare-parts inventory beyond warranty stock	Available on request

### 13.3 Clarifications (open items)

The following items have been assumed in this proposal at industry-standard practice; customer confirmation will refine the proposal. Each is listed with its priority and the default assumed.

#### P1 — Critical (cost-swing potential > 10%):

ID	Subject	Default assumed
Q-018	Project stage (greenfield vs. retrofit)	Greenfield, per technical documents
Q-007	Required completion duration	16 weeks from PO

#### P2 — Important (refines pricing):

ID	Subject	Default assumed
Q-001	Contracting entity	Megaworld Corporation
Q-005	Architectural floor plans	Cable lengths estimated per typical density
Q-008	Mechanical (HVAC) layout drawings	Equipment locations inferred from points list
Q-011	Complete electrical	Metering count assumed per construction-

ID	Subject	Default assumed
	drawing set	bulletin scope
Q-009	Working-hour constraints	Standard daytime greenfield construction

**P3 — Useful (refines pricing precision):**

ID	Subject	Default assumed
Q-003	TUEC project / contract code	Confirmed via document title
Q-004	Construction-bulletin completeness	Latest ‘for construction’ set assumed
Q-012	Integration scope (PMS, FDAS, CCTV, ACS)	None — isolated BMS LAN with single uplink
Q-013	Brand standardization / Megaworld portfolio	Tier-1 BACnet/IP brand per BMS spec
Q-014	Commercial terms	Standard local market
Q-015	Training scope	16-hr operator training included
Q-016	Maintenance contract scope	Not included; offered as option
Q-017	CONDOTELS standard vs. hotel-specific spec	CONDOTELS standard governs unless silent
Q-019	Per-guestroom FCU scope	Not in scope
Q-020	Domestic cold-water booster pump scope	Not in scope
Q-021	Complete BOH AHU schedule	Three confirmed at GND Level

## 14. Acceptance

We thank you for the opportunity to bid for this important project. Should you wish to accept this proposal, please countersign below or issue your standard Purchase Order referencing this document.

The undersigned acknowledges and accepts the terms and conditions stated in this proposal, including the stated assumptions in Section 11 and the inclusions/exclusions/clarifications in Section 13.

**For [BMS Contractor]**

**For Megaworld Corporation**

Signed: \_\_\_\_\_

Signed: \_\_\_\_\_

Name:

Name:

Title:

Title:

Date:

Date:

## Appendix A — Detailed Bill of Quantities

This appendix provides the complete itemised Bill of Quantities, comprising **86 line items** across the seven WBS sections. Items flagged ‘RFQ’ are subject to refinement based on supplier quotations.

### A.1 1.0 Project Management & Engineering

WB S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF Q
1.1	Project management (off-site, full duration, 16 weeks)	640	hr	1,500	960,000	
1.1	Site mobilization (week 1)	80	hr	1,500	120,000	
1.2	Engineering & design (system architecture, panel layouts, IO list, sequences,	320	hr	1,200	384,000	

WB S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF Q
	network)					
1.3	Submittals & approvals administration	80	hr	1,200	96,000	
1.4	Factory Acceptance Test (FAT) delivery	1	lot	80,000	80,000	
1.4	FAT support hours (BMS engineer)	40	hr	1,200	48,000	
	<b>Section subtotal</b>				<b>** 1,688,000**</b>	

## A.2 2.0 Material Supply

WB S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF Q
2.1.1	BMS Server (Primary) — dual-CPU, 16+ GB RAM, redundant PSU	1	each	350,000	350,000	✓
2.1.1	BMS Server (Standby, redundancy)	1	each	350,000	350,000	✓
2.1.2	Operator Workstation	2	each	80,000	160,000	✓
2.1.3	Graphics PC + 55-inch Display	1	set	150,000	150,000	✓
2.1.4	Head-End UPS (3 kVA, 30-min	1	each	90,000	90,000	✓

WB S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF Q
	runtime)					
2.1. 5	Software licenses (server + 3 client + energy module + graphics editor)	1	lot	600,000	600,000	✓
2.1. 6	Server-room peripherals (KVM, console monitor, color laser printer, 19-inch rack)	1	lot	80,000	80,000	✓
2.2. 1	Core managed L2/L3 switch (24-port + 4 SFP)	1	each	120,000	120,000	✓
2.2. 2	Edge managed L2 switch (16-port + 2 SFP)	3	each	35,000	105,000	✓
2.2. 2	Edge managed L2 switch (8-port + 2 SFP)	3	each	18,000	54,000	✓
2.2. 3	Riser fiber, OM3 multimode 6-strand armored	300	m	280	84,000	✓

WB S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF Q
2.2.3	Fiber transceivers (1G SX/LX, paired)	14	each	8,000	112,000	✓
2.2.4	IDF wall-mount enclosures (9U)	6	each	18,000	108,000	✓
2.3.1+2.3.2+2.3.3+2.3.4	BMS field cabinet (small, IP54 wall-mount)	10	each	40,000	400,000	✓
2.3.1+2.3.2+2.3.3+2.3.4	BMS field cabinet (medium, IP54 wall-mount)	6	each	80,000	480,000	✓
2.3.1+2.3.2+2.3.3+2.3.4	BMS field cabinet (large, IP54 wall-mount)	2	each	150,000	300,000	✓
2.3.5	DDC controllers (incl. network gateway controllers)	30	each	90,000	2,700,000	✓
2.3.5	AI input modules (16-channel)	11	each	40,000	440,000	✓
2.3.5	AO output	5	each	45,000	225,000	✓

WB S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF Q
5	modules (16-channel)					
2.3.5	DI input modules (32-channel)	7	each	30,000	210,000	✓
2.3.5	DO output modules (16-channel)	2	each	35,000	70,000	✓
2.3.5	24VDC switching power supplies (5A, redundant for 6 critical panels)	24	each	8,000	192,000	✓
2.3.5	Terminal blocks (push-in 2.5 mm <sup>2</sup> )	900	each	80	72,000	✓
2.3.5	Surge protection (signal-level SPD)	36	each	5,000	180,000	✓
2.3.5	Cable management hardware (DIN rail, ducts, ferrules) per panel	18	lot	8,000	144,000	✓
2.4.1	Temperature sensor — immersion/thermowell (water-side)	12	each	4,500	54,000	✓
2.4.	Temperature	50	each	3,000	150,000	✓

WB S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF Q
1	sensor — duct insertion					
2.4. 1	Temperature sensor — outdoor (weatherproof)	1	each	6,000	6,000	✓
2.4. 2	Humidity sensor (duct/outdoor )	24	each	6,500	156,000	✓
2.4. 3	Pressure sensor — water-side	6	each	8,000	48,000	✓
2.4. 3	Differential pressure sensor (CHW header)	1	each	12,000	12,000	✓
2.4. 3	Pressure sensor — duct static	4	each	8,000	32,000	✓
2.4. 4	Flow sensor — water (insertion)	9	each	25,000	225,000	✓
2.4. 4	BTU meter (ultrasonic, Modbus)	1	each	80,000	80,000	✓
2.4. 5	Modulating valve actuator (BMS- supplied for CHW bypass)	1	each	12,000	12,000	✓
2.4.	CO2 sensor	5	each	8,000	40,000	✓

WB S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF Q
8	(duct return)					
2.4. 8	CO sensor (duct return, casino)	2	each	10,000	20,000	✓
2.4. 8	VOC sensor (ozonizer return)	2	each	12,000	24,000	✓
2.4	Mounting brackets, thermowells, valve fittings	1	lot	2,000	2,000	✓
2.5. 1	Tank temperature sensor (calorifiers)	6	each	3,500	21,000	✓
2.5. 2	HW header temperature sensors (supply/retur n/MUCW)	6	each	4,500	27,000	✓
2.5. 3	Pump aux- contact wiring kits (heat pumps + recirc pumps)	12	each	1,500	18,000	✓
2.5. 4	Boiler steam pressure sensor	2	each	12,000	24,000	✓
2.5. 4	Boiler feedwater temperature sensor	2	each	4,500	9,000	✓
2.5. 4	Boiler fluegas temperature	2	each	8,000	16,000	✓

WB S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF Q
	sensor (high-temp)					
2.5.4	Boiler fluegas O2 sensor (zirconia)	2	each	30,000	60,000	✓
2.5.4	Boiler motorized blowdown valve (BMS-supplied actuator)	2	each	18,000	36,000	✓
2.6.1	Multifunction power meter (Main switchgear class)	3	each	90,000	270,000	✓
2.6.1	Multifunction power meter (Sub-feeder class)	10	each	35,000	350,000	✓
2.6.2	Current transformers (split-core, sized per ampacity)	39	each	4,000	156,000	✓
2.6.4	Modbus serial-to-IP gateway	2	each	25,000	50,000	✓
2.6	Modbus shielded TP cable	300	m	80	24,000	✓
2.7.1	4C × 1.5 mm <sup>2</sup> shielded FRLS control/signal	1720	m	95	163,400	✓

WB	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF
S						Q
	cable					
2.7.	6C × 1.5 mm <sup>2</sup>	149	m	130	19,370	✓
1	shielded FRLS (where conductor count > 4)					
2.7.	BACnet	150	m	90	13,500	✓
2	MS/TP shielded TP cable (low- cap)					
2.7.	Cat6 4P × 23	700	m	90	63,000	✓
3	AWG U/UTP FRLS cable					
2.7.	Conduit (PVC	849	m	120	101,880	✓
5	HW 25 mm)					
2.7.	3C × 2.5 mm <sup>2</sup>	232	m	110	25,520	✓
	FRLS panel power feed cable					
2.7.	Cable	1	lot	30,000	30,000	✓
6	identification (labels, ferrules, marker tags) — full project lot					
2.7.	Cable	18	lot	5,000	90,000	✓
5	management (junction boxes, cable ties) per panel field					
	<b>Section subtotal</b>				<b>** 10,204,670**</b>	

### A.3 3.0 Installation

WB S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF Q
3.0	Installation labor — Wireman / Electrician (cable pulling, conduit, panel install, terminations)	932.9	hr	350	326,515	
3.0	Installation labor — BMS Technician (testing, pre-comm)	358.8	hr	700	251,160	
3.0	Installation labor — Engineer / Supervisor (oversight, fault resolution)	143.5	hr	1,200	172,200	
	<b>Section subtotal</b>				<b>** 749,875**</b>	

### A.4 4.0 Programming & Configuration

WB S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF Q
4.1	Controller programmin g (point database, control loops, schedules, alarms, reports,	173.8	hr	1,200	208,560	

WB						RF
S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	Q
	trends)					
4.2	Graphics development (35 pages: navigation, floor, system, popups, alarm, trend, reports)	256	hr	1,100	281,600	
	<b>Section subtotal</b>				<b>** 490,160**</b>	

#### A.5 5.0 Testing & Commissioning

WB						RF
S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	Q
5.1	Pre-commissioning (cable continuity, megger, panel power-up smoke test) — covered in B4	0	lot	0	0	
5.2	Point-to-point (P2P) testing	57.4	hr	700	40,180	
5.3	Functional testing per equipment	88.5	hr	700	61,950	
5.4	Integrated commissioning (cross-system sequences, energy	32	hr	1,200	38,400	

WB	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF
S						Q
	savings)					
5.5	Owner T&C / SAT support (1 week)	40	hr	1,200	48,000	
5.6	Snagging / punch-list resolution	30	hr	700	21,000	
5.7	As-built documentation package (drawings, O&M, point database, programming archive)	1	lot	80,000	80,000	
5.7	As-built documentation engineer hours	80	hr	1,200	96,000	
	<b>Section subtotal</b>				<b>** 385,530**</b>	

## A.6 6.0 Training & Handover

WB	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF
S						Q
6.1	Operator training — on-site, 16 hours over 2 days, up to 6 operators	1	lot	60,000	60,000	
6.1	Training delivery hours (1 trainer × 16	16	hr	1,200	19,200	

WB	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF
S						Q
	hr)					
6.3	Documentati on handover (formal, with sign-off)	8	hr	1,500	12,000	
	<b>Section subtotal</b>				<b>** 91,200**</b>	

### A.7 7.0 Optional / Out-of-scope

WB	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	RF
S						Q
7.1	[OPTION] 1- year preventive maintenance contract (post- warranty)	1	yr	0	0	✓
7.2	[OPTION] Additional administrato r training (8 hr session)	0	lot	30,000	0	
7.3	[OPTION] FDAS integration (BACnet/Mod bus from fire panel + smoke control sequences)	0	lot	0	0	✓
7.4	[OPTION] PMS integration	0	lot	0	0	✓

WB						RF
S	Description	Qty	Unit	Unit Price (PHP)	Extended (PHP)	Q
	(guestroom occupancy → BMS for FCU control)					
	<b>Section subtotal</b>				<b>** 0**</b>	

## Appendix B — Equipment Takeoff

The complete equipment takeoff below lists each of the **59 BMS-monitored equipment instances** with location, panel assignment, primary supplier, and BMS-side I/O point counts.

### B.1 Summary

Equipment Class	Count
Multifunction Power Meter (Feeder)	8
AHU (Chilled-Water-Served)	5
Exhaust Fan (General)	5
Exhaust Fan (Toilet)	4
AHU (Modulating CHW-served)	3
Condenser Water Pump	3
DOAS Unit	3
Recirculating Pump	3
Precooled Air Handling Unit	3
Steam Boiler	2
Calorifier (Hot Water Storage Tank)	2
Chiller (Package Water-Cooled)	2
Primary CHW Pump	2
Cooling Tower	2
Heat Pump	2

Equipment Class	Count
BTU Meter	1
CHW Bypass Header	1
CHW Return Main Header	1
CHW Supply Main Header	1
Primary CHW Pump (Standby)	1
Cooling Tower (Common)	1
Condenser Water Header	1
Hot Water Header Set	1
Ozone Generator (UV-light or Corona)	1
Multifunction Power Meter (Main)	1
<b>Total instances</b>	<b>59</b>

## B.2 Detailed equipment list

ID	Equipment Class	Location	Panel	Primary C/O	I/O
AH U- 2F- A	AHU (Chilled-Water-Served)	2F Common Public	PNL- AIR-2F	Equipment Supplier	14
AH U- 2F- B	AHU (Chilled-Water-Served)	2F Common Public	PNL- AIR-2F	Equipment Supplier	14
AH U- 3F- AM	AHU (Chilled-Water-Served)	3F Amenity	PNL- AIR-3F	Equipment Supplier	14
AH U- CAS INO -1	AHU (Modulating CHW-served)	Ground Floor Casino	PNL- CASINO -GF	Equipment Supplier	14
AH	AHU (Modulating	Ground	PNL-	Equipment	14

ID	Equipment Class	Location	Panel	Primary C/O	I/O
U-CASINO-2	CHW-served)	Floor Casino	CASINO-GF	Supplier	
AH-U-GF-CASINO	AHU (Modulating CHW-served)	Ground Floor Casino Lobby	PNL-CASINO-GF	Equipment Supplier	14
AH-U-GF-LOB	AHU (Chilled-Water-Served)	Ground Floor Lobby	PNL-AIR-GF	Equipment Supplier	14
AH-U-GF-REST	AHU (Chilled-Water-Served)	Ground Floor Restaurant	PNL-AIR-GF	Equipment Supplier	14
BLR-1	Steam Boiler	Lower Ground Boiler Room	PNL-BLR-LG	Equipment Supplier	16
BLR-2	Steam Boiler	Lower Ground Boiler Room	PNL-BLR-LG	Equipment Supplier	16
BTU-CHW-MAIN	BTU Meter	2F Chiller Plant Room	PNL-CH-PLANT-2F	BMS Contractor	5
CA-LO-R-LG	Calorifier (Hot Water Storage Tank)	Lower Ground Calorifier Room	PNL-PL-LG	BMS Contractor	1
CA	Calorifier (Hot Water	Roofdeck	PNL-	BMS Contractor	1

ID	Equipment Class	Location	Panel	Primary C/O	I/O
LO R- RO OF	Storage Tank)	DOAS	AIR- ROOF		
CH- 1	Chiller (Package Water-Cooled)	2F Chiller Plant Room	PNL- CH- PLANT- 2F	Equipment Supplier	28
CH- 2	Chiller (Package Water-Cooled)	2F Chiller Plant Room	PNL- CH- PLANT- 2F	Equipment Supplier	28
CH W- BYP	CHW Bypass Header	2F Chiller Plant Room	PNL- CH- PLANT- 2F	BMS Contractor	4
CH W- RE T- HD R	CHW Return Main Header	2F Chiller Plant Room	PNL- CH- PLANT- 2F	BMS Contractor	2
CH W- SUP - HD R	CHW Supply Main Header	2F Chiller Plant Room	PNL- CH- PLANT- 2F	BMS Contractor	2
CH WP -1	Primary CHW Pump	2F Chiller Plant Room	PNL- CH- PLANT- 2F	Equipment Supplier	7
CH WP -2	Primary CHW Pump	2F Chiller Plant Room	PNL- CH- PLANT- 2F	Equipment Supplier	7

ID	Equipment Class	Location	Panel	Primary C/O	I/O
CH WP -3	Primary CHW Pump (Standby)	2F Chiller Plant Room	PNL- CH- PLANT- 2F	Equipment Supplier	7
CT- 1	Cooling Tower	Roofdeck Cooling Tower	PNL-CT- ROOF	BMS Contractor	7
CT- 2	Cooling Tower	Roofdeck Cooling Tower	PNL-CT- ROOF	BMS Contractor	7
CT- CO MM ON	Cooling Tower (Common)	Roofdeck Cooling Tower	PNL-CT- ROOF	BMS Contractor	6
CW - HD R	Condenser Water Header	Roofdeck Cooling Tower	PNL-CT- ROOF	BMS Contractor	2
CW P-1	Condenser Water Pump	2F Chiller Plant Room	PNL- CH- PLANT- 2F	Equipment Supplier	4
CW P-2	Condenser Water Pump	2F Chiller Plant Room	PNL- CH- PLANT- 2F	Equipment Supplier	4
CW P-3	Condenser Water Pump	2F Chiller Plant Room	PNL- CH- PLANT- 2F	Equipment Supplier	4
DO AS- 2F	DOAS Unit	2F Common Public	PNL- AIR-2F	Equipment Supplier	24
DO AS- RD	DOAS Unit	Roofdeck DOAS	PNL- AIR- ROOF	Equipment Supplier	24

ID	Equipment Class	Location	Panel	Primary C/O	I/O
1					
DO AS- RD	DOAS Unit	Roofdeck DOAS	PNL- AIR- ROOF	Equipment Supplier	24
2					
EAS - GE N- 2F	Exhaust Fan (General)	2F Common Public	PNL- AIR-2F	Equipment Supplier	3
EAS - GE N- 3F	Exhaust Fan (General)	3F Amenity	PNL- AIR-3F	Equipment Supplier	3
EAS - GE N- BS MT	Exhaust Fan (General)	Basement BOH	PNL- AIR- BSMT	Equipment Supplier	3
EAS - GE N- GF	Exhaust Fan (General)	Ground Floor Lobby	PNL- AIR-GF	Equipment Supplier	3
EAS - GE N- RO OF	Exhaust Fan (General)	Roofdeck DOAS	PNL- AIR- ROOF	Equipment Supplier	3
EAS - TOI LET	Exhaust Fan (Toilet)	2F Common Public	PNL- AIR-2F	Equipment Supplier	3

ID	Equipment Class	Location	Panel	Primary C/O	I/O
-2F					
EAS - TOI LET -3F	Exhaust Fan (Toilet)	3F Amenity	PNL- AIR-3F	Equipment Supplier	3
EAS - TOI LET - BS MT	Exhaust Fan (Toilet)	Basement BOH	PNL- AIR- BSMT	Equipment Supplier	3
EAS - TOI LET -GF	Exhaust Fan (Toilet)	Ground Floor Lobby	PNL- AIR-GF	Equipment Supplier	3
HP- LG- 1	Heat Pump	Lower Ground Calorifier Room	PNL-PL- LG	Equipment Supplier	3
HP- RO OF- 1	Heat Pump	Roofdeck DOAS	PNL- AIR- ROOF	Equipment Supplier	3
HW - HE AD ERS -LG	Hot Water Header Set	Lower Ground Calorifier Room	PNL-PL- LG	BMS Contractor	3
HW - PU MP-	Recirculating Pump	Lower Ground Calorifier Room	PNL-PL- LG	Equipment Supplier	3

ID	Equipment Class	Location	Panel	Primary C/O	I/O
LG-1					
HW-PU-MP-LG-2	Recirculating Pump	Lower Ground Calorifier Room	PNL-PL-LG	Equipment Supplier	3
HW-PU-MP-RO-OF-1	Recirculating Pump	Roofdeck DOAS	PNL-AIR-ROOF	Equipment Supplier	3
OZ-CASINO-1	Ozone Generator (UV-light or Corona)	Ground Floor Casino	PNL-CASINO-GF	Equipment Supplier	3
PA-HU-2F	Precooled Air Handling Unit	2F Common Public	PNL-AIR-2F	Equipment Supplier	12
PA-HU-BS-MT	Precooled Air Handling Unit	Basement BOH	PNL-AIR-BSMT	Equipment Supplier	12
PA-HU-RO-OF	Precooled Air Handling Unit	Roofdeck DOAS	PNL-AIR-ROOF	Equipment Supplier	12
PM-AIR-2F	Multifunction Power Meter (Feeder)	2F Common Public	PNL-AIR-2F	BMS Contractor	5
PM-AIR-GF	Multifunction Power Meter (Feeder)	Ground Floor Lobby	PNL-AIR-GF	BMS Contractor	5

ID	Equipment Class	Location	Panel	Primary C/O	I/O
PM-BOILER	Multifunction Power Meter (Feeder)	Lower Ground Boiler Room	PNL-BLR-LG	BMS Contractor	5
PM-CASINO	Multifunction Power Meter (Feeder)	Ground Floor Casino	PNL-CASINO-GF	BMS Contractor	5
PM-CHILLER	Multifunction Power Meter (Feeder)	2F Chiller Plant Room	PNL-CH-PLANT-2F	BMS Contractor	5
PM-COOLING	Multifunction Power Meter (Feeder)	Roofdeck Cooling Tower	PNL-CT-ROOF	BMS Contractor	5
PM-FIRE	Multifunction Power Meter (Feeder)	Lower Ground Boiler Room	PNL-PL-LG	BMS Contractor	5
PM-MAIN	Multifunction Power Meter (Main)	Lower Ground Main Switchgear	PNL-PM-LG	BMS Contractor	8
PM-PLUMB	Multifunction Power Meter (Feeder)	Lower Ground Calorifier Room	PNL-PL-LG	BMS Contractor	5

## Appendix C — Cable Schedule Summary

Total cable footage: **2,832 m** across 96 field cables, 6 trunks, and 11 power feeds.

### C.1 Field cable summary by panel

Panel	Field cable length (m)
PNL-CH-PLANT-2F	17

Panel	Field cable length (m)
PNL-AIR-2F	15
PNL-AIR-ROOF	13
PNL-CASINO-GF	11
PNL-AIR-GF	9
PNL-CT-ROOF	8
PNL-PL-LG	7
PNL-AIR-3F	5
PNL-BLR-LG	5
PNL-AIR-BSMT	5
PNL-PM-LG	1

## C.2 Trunk and backbone cabling

ID	From	To	Cable type	Length (m)
T0097	BMS Server Room (head-end)	All BMS panels at 2nd Floor	Cat6 4P × 23 AWG U/UTP, FRLS jacket (BACnet/IP) — riser fibe...	80
T0098	BMS Server Room (head-end)	All BMS panels at Basem ent	Cat6 4P × 23 AWG U/UTP, FRLS jacket (BACnet/IP) — riser fibe...	80
T0099	BMS Server Room (head-end)	All BMS panels at Groun d	Cat6 4P × 23 AWG U/UTP, FRLS jacket (BACnet/IP) — riser fibe...	80
T0100	BMS Server Room (head-end)	All BMS panels at Lower	Cat6 4P × 23 AWG U/UTP, FRLS jacket (BACnet/IP) — riser fibe...	80

ID	From	To	Cable type	Length (m)
		Groun d		
T0101	BMS Server Room (head-end)	All BMS panels at Roofd eck	Cat6 4P × 23 AWG U/UTP, FRLS jacket (BACnet/IP) — riser fibe...	80
T0102	BMS Server Room (head-end)	All BMS panel contro llers (MS/T P daisy- chain or branc hed)	BACnet MS/TP shielded twisted-pair trunk, 1pr × 22 AWG low-c...	330

## Appendix D — Programming Object and Commissioning Inventory

### D.1 Programming object summary

Object class	Count	Programming hours
Point database	462	46.2
Control loops	33	66.0
Alarms	63	9.4
Trends	332	33.2
Schedules	8	4.0
Reports	10	15.0
<b>Total</b>	<b>908</b>	<b>173.8</b>

## D.2 Control loop inventory

Equipment instances requiring programmed control sequences:

Equipment	Class	Location
AHU-2F-A	AHU (Chilled-Water-Served)	2F Common Public
AHU-2F-B	AHU (Chilled-Water-Served)	2F Common Public
AHU-3F-AM	AHU (Chilled-Water-Served)	3F Amenity
AHU-CASINO-1	AHU (Modulating CHW-served)	Ground Floor Casino
AHU-CASINO-2	AHU (Modulating CHW-served)	Ground Floor Casino
AHU-GF-CASINO	AHU (Modulating CHW-served)	Ground Floor Casino Lobby
AHU-GF-LOB	AHU (Chilled-Water-Served)	Ground Floor Lobby
AHU-GF-REST	AHU (Chilled-Water-Served)	Ground Floor Restaurant
BLR-1	Steam Boiler	Lower Ground Boiler Room
BLR-2	Steam Boiler	Lower Ground Boiler Room
BTU-CHW-MAIN	BTU Meter	2F Chiller Plant Room
CH-1	Chiller (Package Water-Cooled)	2F Chiller Plant Room
CH-2	Chiller (Package Water-Cooled)	2F Chiller Plant Room
CHW-BYP	CHW Bypass Header	2F Chiller Plant Room
CHWP-1	Primary CHW Pump	2F Chiller Plant Room
CHWP-2	Primary CHW Pump	2F Chiller Plant Room

Equipment	Class	Location
CHWP-3	Primary CHW Pump (Standby)	2F Chiller Plant Room
CT-1	Cooling Tower	Roofdeck Cooling Tower
CT-2	Cooling Tower	Roofdeck Cooling Tower
CWP-1	Condenser Water Pump	2F Chiller Plant Room
CWP-2	Condenser Water Pump	2F Chiller Plant Room
CWP-3	Condenser Water Pump	2F Chiller Plant Room
DOAS-2F	DOAS Unit	2F Common Public
DOAS-RD1	DOAS Unit	Roofdeck DOAS
DOAS-RD2	DOAS Unit	Roofdeck DOAS
HP-LG-1	Heat Pump	Lower Ground Calorifier Room
HP-ROOF-1	Heat Pump	Roofdeck DOAS
HW-PUMP-LG-1	Recirculating Pump	Lower Ground Calorifier Room
HW-PUMP-LG-2	Recirculating Pump	Lower Ground Calorifier Room
HW-PUMP-ROOF-1	Recirculating Pump	Roofdeck DOAS
PAHU-2F	Precooled Air Handling Unit	2F Common Public
PAHU-BSMT	Precooled Air Handling Unit	Basement BOH
PAHU-ROOF	Precooled Air Handling Unit	Roofdeck DOAS

### D.3 Commissioning point inventory

Test category	Count	Commissioning hours
P2P (point-to-point)	383	57.4
Functional tests	59	88.5

Test category	Count	Commissioning hours
Integrated sequences	8	32.0
<b>Total</b>	<b>450</b>	<b>177.9</b>

## Appendix E — Panel Schedule (Detailed)

Per-panel I/O density, controller count, network drops, and equipment instances served:

### PNL-AIR-2F — 2F Common Public

- **Equipment served:** 7 instances — AHU-2F-A, AHU-2F-B, DOAS-2F, EAS-GEN-2F, EAS-TOILET-2F, PAHU-2F, PM-AIR-2F
- **System scope:** Air Conditioning, Exhaust, Power Monitoring, Ventilation
- **I/O summary:** 70 physical · 4 HLI · 1 Network · 75 total
- **Controller estimate:** 2 DDC + 1 gateway = 2 controllers
- **Power estimate:** 55 W
- **Enclosure:** Wall-mount IP54 metal cabinet, sized per controller count + 30% spare

### PNL-AIR-3F — 3F Amenity

- **Equipment served:** 3 instances — AHU-3F-AM, EAS-GEN-3F, EAS-TOILET-3F
- **System scope:** Air Conditioning, Exhaust
- **I/O summary:** 20 physical · 0 HLI · 0 Network · 20 total
- **Controller estimate:** 1 DDC + 0 gateway = 1 controllers
- **Power estimate:** 25 W
- **Enclosure:** Wall-mount IP54 metal cabinet, sized per controller count + 30% spare

### PNL-AIR-BSMT — Basement BOH

- **Equipment served:** 3 instances — EAS-GEN-BSMT, EAS-TOILET-BSMT, PAHU-BSMT
- **System scope:** Exhaust, Ventilation
- **I/O summary:** 18 physical · 0 HLI · 0 Network · 18 total

- **Controller estimate:** 1 DDC + 0 gateway = 1 controllers
- **Power estimate:** 25 W
- **Enclosure:** Wall-mount IP54 metal cabinet, sized per controller count + 30% spare

### PNL-AIR-GF — Ground Floor Lobby / Ground Floor Restaurant

- **Equipment served:** 5 instances — AHU-GF-LOB, AHU-GF-REST, EAS-GEN-GF, EAS-TOILET-GF, PM-AIR-GF
- **System scope:** Air Conditioning, Exhaust, Power Monitoring
- **I/O summary:** 34 physical · 4 HLI · 1 Network · 39 total
- **Controller estimate:** 1 DDC + 1 gateway = 2 controllers
- **Power estimate:** 55 W
- **Enclosure:** Wall-mount IP54 metal cabinet, sized per controller count + 30% spare

### PNL-AIR-ROOF — Roofdeck DOAS

- **Equipment served:** 7 instances — CALOR-ROOF, DOAS-RD1, DOAS-RD2, EAS-GEN-ROOF, HP-ROOF-1, HW-PUMP-ROOF-1, PAHU-ROOF
- **System scope:** Exhaust, Hot Water, Ventilation
- **I/O summary:** 70 physical · 0 HLI · 0 Network · 70 total
- **Controller estimate:** 2 DDC + 0 gateway = 2 controllers
- **Power estimate:** 50 W
- **Enclosure:** Wall-mount IP54 metal cabinet, sized per controller count + 30% spare

### PNL-BLR-LG — Lower Ground Boiler Room

- **Equipment served:** 3 instances — BLR-1, BLR-2, PM-BOILER
- **System scope:** Boiler, Power Monitoring
- **I/O summary:** 32 physical · 4 HLI · 1 Network · 37 total
- **Controller estimate:** 1 DDC + 1 gateway = 2 controllers
- **Power estimate:** 55 W
- **Enclosure:** Wall-mount IP54 metal cabinet, sized per controller count + 30% spare

### PNL-CASINO-GF — Ground Floor Casino / Ground Floor Casino Lobby

- **Equipment served:** 5 instances — AHU-CASINO-1, AHU-CASINO-2, AHU-GF-CASINO, OZ-CASINO-1, PM-CASINO

- **System scope:** Air Conditioning, Casino Air Conditioning, Power Monitoring
- **I/O summary:** 45 physical · 4 HLI · 1 Network · 50 total
- **Controller estimate:** 2 DDC + 1 gateway = 2 controllers
- **Power estimate:** 55 W
- **Enclosure:** Wall-mount IP54 metal cabinet, sized per controller count + 30% spare

### PNL-CH-PLANT-2F — 2F Chiller Plant Room

- **Equipment served:** 13 instances — BTU-CHW-MAIN, CH-1, CH-2, CHW-BYP, CHW-RET-HDR, CHW-SUP-HDR, CHWP-1, CHWP-2, ...
- **System scope:** Chilled Water Plant, Condenser Water Loop, Power Monitoring
- **I/O summary:** 59 physical · 44 HLI · 4 Network · 107 total
- **Controller estimate:** 2 DDC + 1 gateway = 2 controllers
- **Power estimate:** 70 W
- **Enclosure:** Wall-mount IP54 metal cabinet, sized per controller count + 30% spare

### PNL-CT-ROOF — Roofdeck Cooling Tower

- **Equipment served:** 5 instances — CT-1, CT-2, CT-COMMON, CW-HDR, PM-COOLING
- **System scope:** Condenser Water Loop, Power Monitoring
- **I/O summary:** 22 physical · 4 HLI · 1 Network · 27 total
- **Controller estimate:** 1 DDC + 1 gateway = 2 controllers
- **Power estimate:** 55 W
- **Enclosure:** Wall-mount IP54 metal cabinet, sized per controller count + 30% spare

### PNL-PL-LG — Lower Ground Boiler Room / Lower Ground Calorifier Room

- **Equipment served:** 7 instances — CALOR-LG, HP-LG-1, HW-HEADERS-LG, HW-PUMP-LG-1, HW-PUMP-LG-2, PM-FIREPMP, PM-PLUMB
- **System scope:** Hot Water, Power Monitoring
- **I/O summary:** 13 physical · 8 HLI · 2 Network · 23 total
- **Controller estimate:** 1 DDC + 1 gateway = 2 controllers
- **Power estimate:** 60 W

- **Enclosure:** Wall-mount IP54 metal cabinet, sized per controller count + 30% spare

### PNL-PM-LG — Lower Ground Main Switchgear

- **Equipment served:** 1 instances — PM-MAIN-LG
  - **System scope:** Power Monitoring
  - **I/O summary:** 0 physical · 7 HLI · 1 Network · 8 total
  - **Controller estimate:** 1 DDC + 1 gateway = 2 controllers
  - **Power estimate:** 55 W
  - **Enclosure:** Wall-mount IP54 metal cabinet, sized per controller count + 30% spare
- 

## Appendix F — Customer Clarification Request List (RFI)

The following clarifications, if answered, will allow us to refine our proposal further. Items are grouped by priority and tagged with the recipient discipline.

### P1 — Critical (cost-swing potential > 10%, please prioritize):

ID	Question	Default assumed
Q-018	Confirm project is greenfield (cover letter said ‘rehabilitation’).	Greenfield, per technical documents
Q-007	What is the required project completion date or duration?	16 weeks from PO

### P2 — Important (refines pricing):

ID	Question	Default assumed
Q-001	Confirm contracting entity (cover letter does not name requesting party).	Megaworld Corporation
Q-005	Please share the complete architectural floor-plan set.	Cable lengths per typical density
Q-008	Please share the	Plant-room cable runs and control wiring

ID	Question	Default assumed
	mechanical (HVAC) layout drawings.	estimated
Q-011	Please share the complete electrical drawing set.	Power metering per A-EE-001
Q-009	Confirm working-hour constraints.	Standard daytime construction

**P3 — Useful (refines pricing precision):**

ID	Question	Default assumed
Q-003	Confirm 'TUEC' project / contract code.	Confirmed via document title
Q-004	Confirm complete latest 'for construction' set.	Bulletin No.8 + standard set
Q-012	Network/IT integration scope.	None in base; integrations as options
Q-013	Brand preferences / Megaworld portfolio standardization.	Tier-1 BACnet/IP
Q-014	Commercial terms (payment, retention, warranty, LD, currency).	Standard local market
Q-015	Training scope.	16-hr operator training included
Q-016	Maintenance contract scope.	Not included; offered as option
Q-017	Hotel scope vs. CONDOTELS standard.	CONDOTELS governs
Q-019	Per-guestroom FCU scope.	Not in scope
Q-020	Domestic cold-water booster pump scope.	Not in scope
Q-021	Complete BOH AHU schedule (only 3 of 10	3 confirmed

ID	Question	Default assumed
	location-tagged in points list).	

*End of comprehensive proposal document. Refer to the accompanying Excel and Word files in the deliverables package for additional supporting data and the editable Bill of Quantities.*